

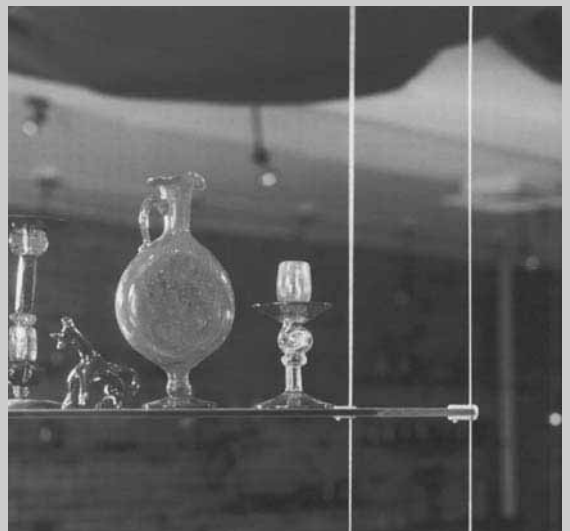


Display Solutions

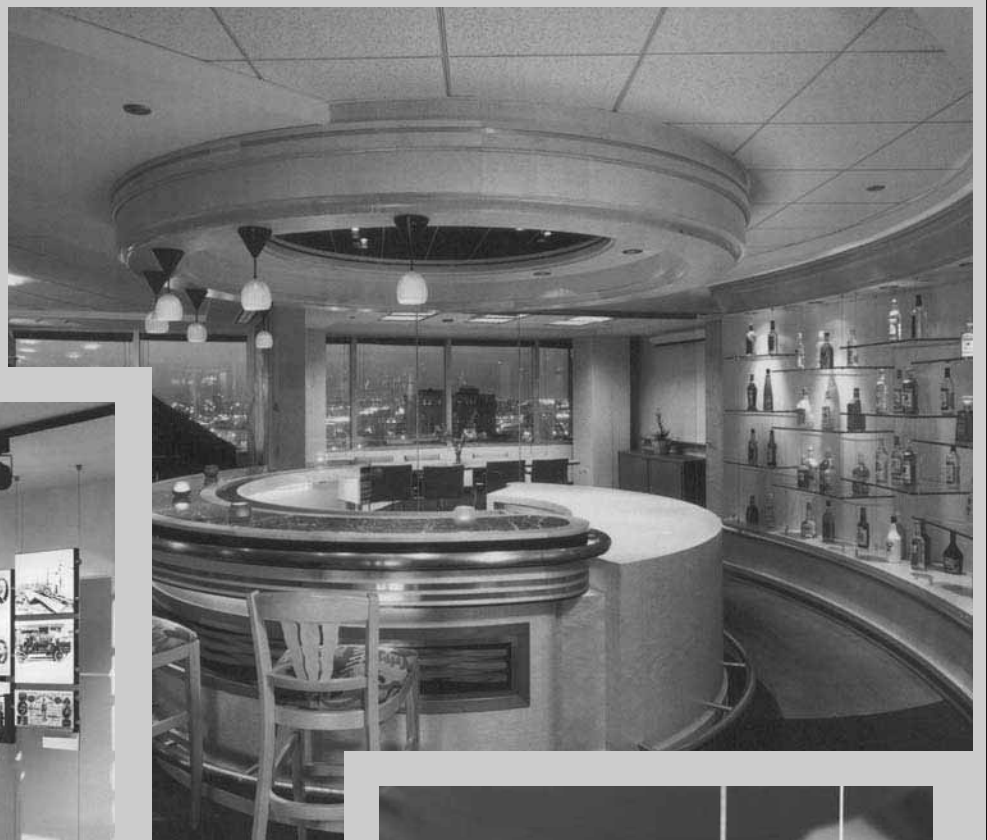

Basic Cable

The principal characteristics of the Cable Design cable systems are subtle, airy appearance combined with great strength. Our cable system's purpose is to let only the merchandise stand out without themselves being obvious.

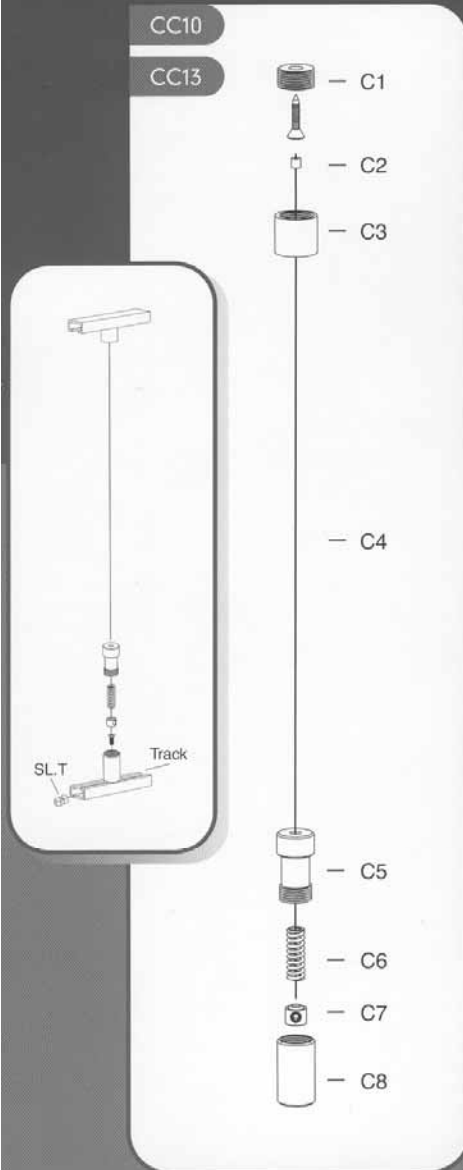

Our cables are made of stainless steel, composed of 7 strands, each one composed of 7 wires, for a total of 49 steel wires twisted together. The cable thickness is 1/16" (approx. 1.6mm). Each cable can be loaded with up to 250-lb. (approx. 115-kg).

Our basic cable, called "CC", is composed of parts C1 through C8 and is shipped assembled. Available in standard 10 or 13 foot lengths, or custom cut to order, our cable kits have a spring in the bottom anchor that applies tension to the cables for greater display stability. The tension of the cables can easily be adjusted by hand.

The lengths of the other systems, for wall or open area application, are indicated inside this section. Extra cable can be added to any cable system upon request.

All of the cable systems shown in this section must be anchored into a solid material or can be mounted on our aluminium track for mobility.

All the components are made from brass with a satin chrome finish. Other finishes such as polished chrome, satin or polished brass and black are made to order.


For Posters, Signage, Graphics, etc. (Wall to Floor, Wall to Wall, Ceiling to Wall)

SYSTEM E, F, H



Wall to cable: 21mm

With the simple addition of our special toggles any of the wall cables can be converted for use with Slatwall

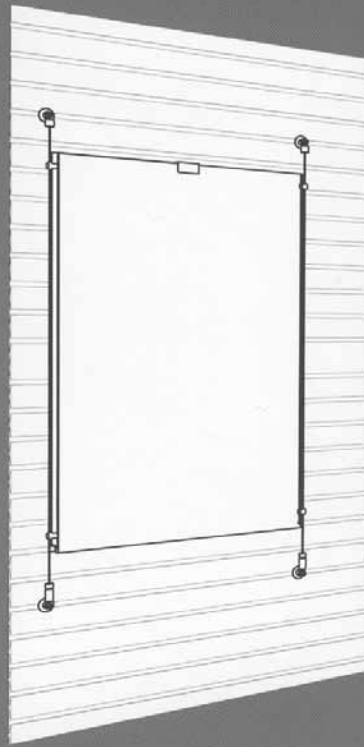

For Shelving (Wall to Wall, Wall to Floor, Ceiling to Wall)

Four dimensions available "d"



CM 30L1 - 16,6 cm (6 1/2")

CM 30L2 - 23,5 cm (9 1/4")

CM 30L3 - 30,0 cm (11 13/16")


CM 30L4 - 30,48 cm (12")

SYSTEM A, B, G

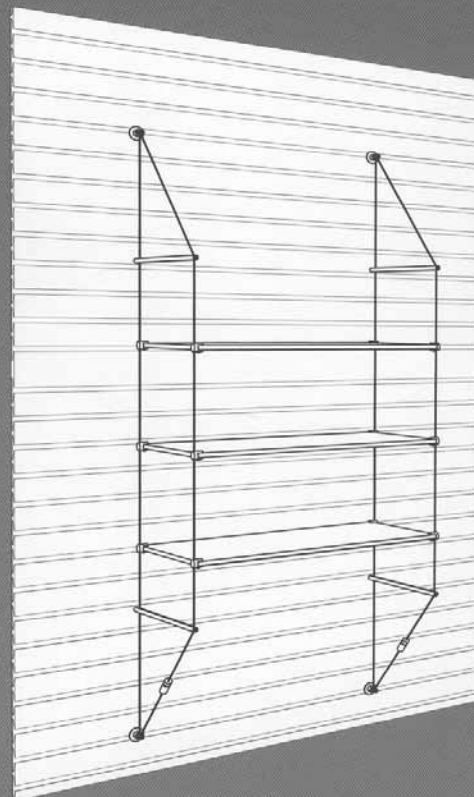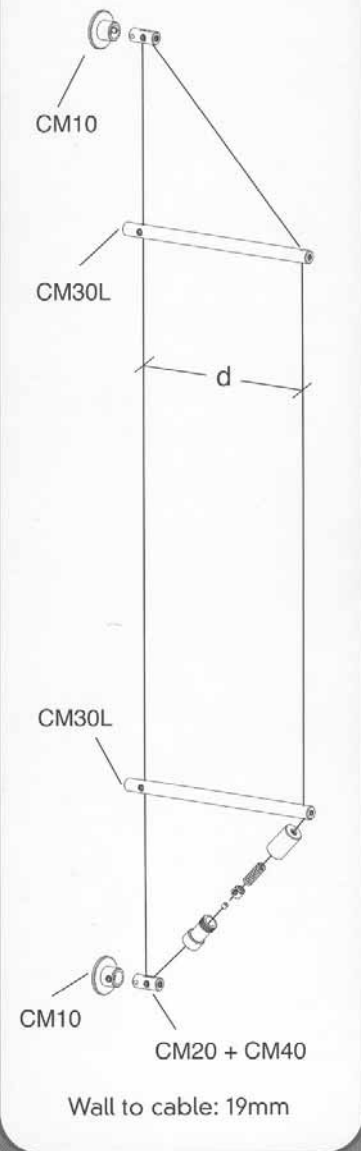


WALL TO FLOOR WALL TO WALL CEILING TO WALL

SYSTEM A

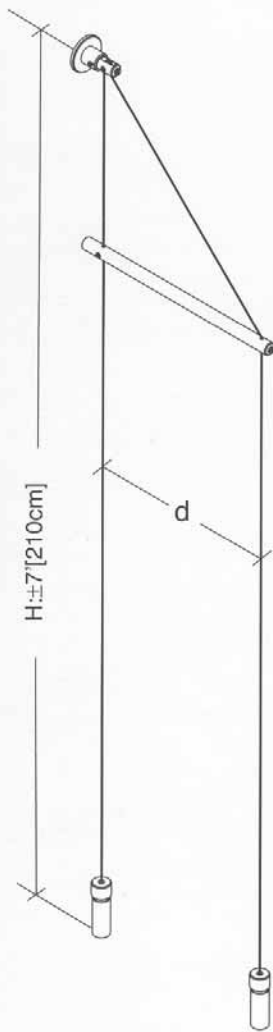


Wall to cable: 19mm

SYSTEM B

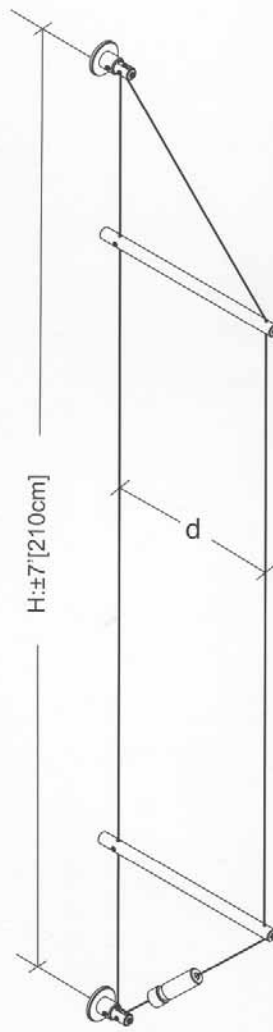

Wall to cable: 19mm

SYSTEM G

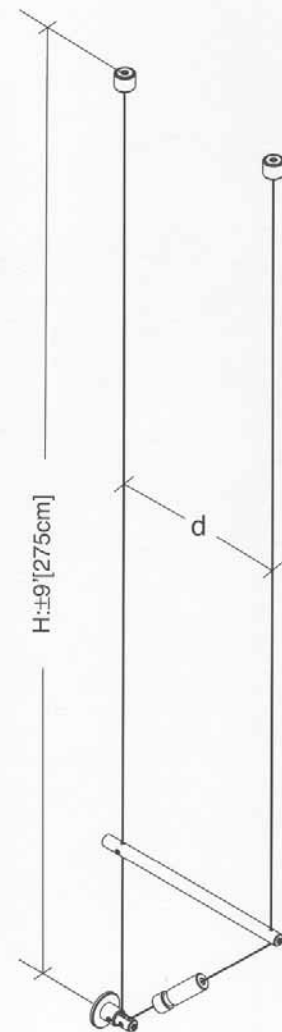

Wall to cable: 19mm

FOR SHELVING GRAPHICS


For Shelving and Graphics (Ceiling to Floor)

Two dimensions available "d"


CM31L3 30,0 - cm (11 13/16")

CM31L4 30,48 - cm (12")

SYSTEM C

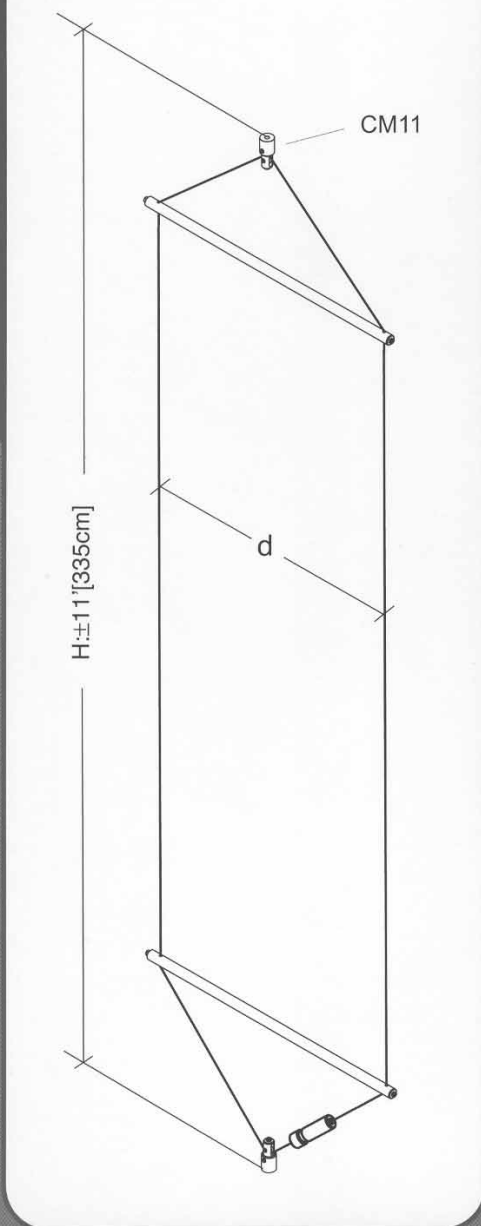


SYSTEM D

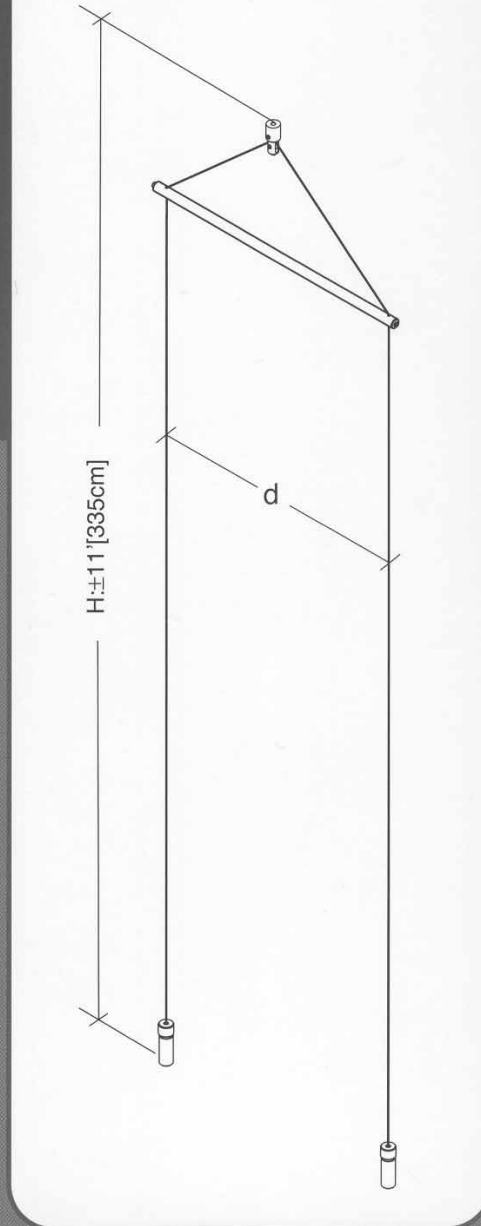

WALL TO FLOOR WALL TO WALL CEILING TO WALL

SYSTEM E

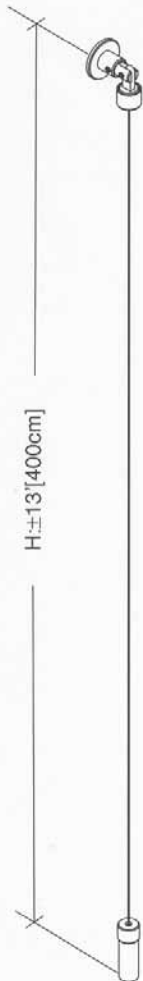

H:±13 [400cm]

Wall to cable: 21mm

SYSTEM F



H:±6 [180cm]

Wall to cable: 21mm

SYSTEM H



H:±13 [400cm]

Wall to cable: 21mm


FOR BANNERS SIGNAGE & GLASS CASES

For banners, signage and glass cases

SYSTEM CT




SYSTEM CCV

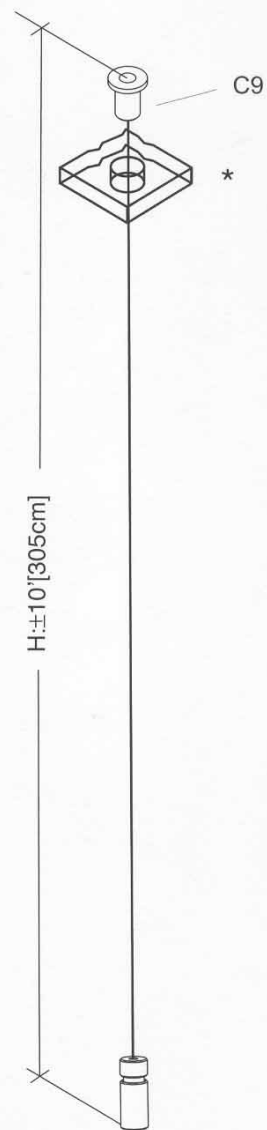

*Requires 1/2" \varnothing hole

Heavy Cable

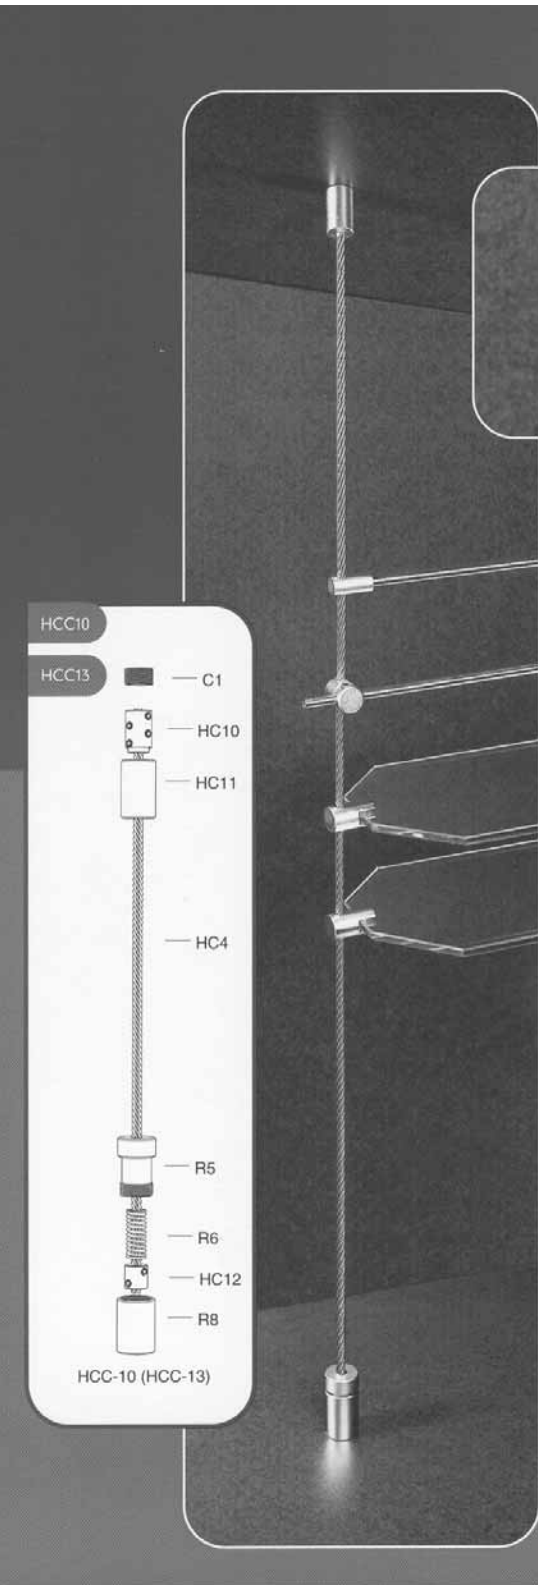

Similar in form and function to our other Cable and Rod systems, the Heavy Cable is designed with a different aesthetic in mind. It can be used for the same applications as our lighter cable and also in architectural applications for heavier, more structural materials.


The Heavy Cable is 5mm or 3/16" diameter and made from stainless steel, composed of 7 strands, each composed of 19 wires, for a total of 133 steel wires twisted together. The cable load ratings are pending.



















The basic Heavy Cable, called "HCC", is composed of parts C1, HC10, HC11, R5, R6, HC12, and R8, plus standard cable lengths of 10 or 13 feet. Longer lengths can be custom cut for large orders upon request. Aside from the top and bottom anchor pieces specific to the HCC, all the supports and accessories from our Rod System will fit the new Heavy Cable. (page RB1.1 — RB2.6 "Rod supports")

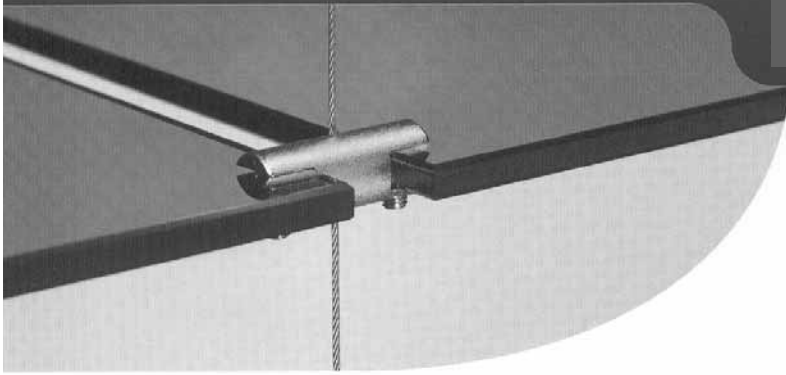As with our other systems, the Heavy Cable must be anchored into a solid structural material.

All the components are made from brass with a satin chrome finish. Other finishes such as polished chrome, satin or polished brass or black are made to order, for components only.

























Horizontal Shelf Supports · Double Horizontal Shelf Supports









<p>CS1.1</p> 	<p>HORIZONTAL SUPPORT Shelf thickness: 6mm (1/4") - 10mm (3/8") Drill hole: Ø10mm (3/8") Minimum slot width: 2mm (5/64")</p>		
<p>CS1.2</p> 	<p>HORIZONTAL SUPPORT Shelf thickness: 10mm (3/8") - 12mm (1/2") Drill hole: Ø12mm (1/2") Minimum slot width: 2mm (5/64")</p>		
<p>CS2.1</p> 	<p>HORIZONTAL SUPPORT Shelf thickness: Minimum: 4mm (5/32") Maximum: 8mm (5/16") Cable spacing: shelf width + 19mm (3/4")</p>		
<p>CS2.2</p> 	<p>HORIZONTAL SUPPORT Shelf thickness: Minimum: 4mm (5/32") Maximum: 10mm (3/8") Cable spacing: shelf width + 19mm (3/4")</p>		
<p>CS3.1</p> 	<p>HORIZONTAL SUPPORT Shelf thickness: Minimum: 4mm (5/32") Maximum: 8mm (5/16") Cable spacing: shelf width + 19mm (3/4")</p>		
<p>CS3.2</p> 	<p>HORIZONTAL SUPPORT Shelf thickness: Minimum: 4mm (5/32") Maximum: 10mm (3/8") Cable spacing: shelf width + 19mm (3/4")</p>		

CB.1.2


Pivoting Supports · Double Pivoting Supports · Combination Supports
















<p>CSM1.1</p> 	<p>PIVOTING SUPPORT Max. shelf/panel thickness: 8mm(5/16") Cable spacing: shelf/panel width + 19mm(3/4")</p>		
<p>CSM1.2</p> 	<p>PIVOTING SUPPORT Max. shelf/panel thickness: 10mm(3/8") Cable spacing: shelf/panel width + 19mm(3/4")</p>		
<p>CSM2.1</p> 	<p>DOUBLE PIVOTING SUPPORT Max. shelf/panel thickness: 8mm(5/16") Cable spacing: shelf/panel width + 19mm(3/4")</p>		
<p>CSM2.2</p> 	<p>DOUBLE PIVOTING SUPPORT Max. shelf/panel thickness: 10mm(3/8") Cable spacing: shelf/panel width + 19mm(3/4")</p>		
<p>CSM10.1</p> 	<p>COMBINATION SUPPORT Max. shelf/panel thickness: 8mm(5/16") Max vertical panel thickness: 8mm(5/16") Cable spacing: shelf/panel width + 19mm(3/4")</p>		
<p>CSM10.2</p> 	<p>COMBINATION SUPPORT Max. shelf/panel thickness: 10mm(3/8") Max vertical panel thickness: 8mm(5/16") Cable spacing: shelf/panel width + 19mm(3/4")</p>		
<p>CSM11.1</p> 	<p>COMBINATION SUPPORT Max. shelf/panel thickness: 8mm(5/16") Max vertical panel thickness: 6mm(1/4") VBP1.1 bolt: Ø16mm(5/8") Vertical panel requires Ø8mm(5/16") holes</p>		
<p>CSM11.2</p> 	<p>COMBINATION SUPPORT Max. shelf/panel thickness: 10mm(3/8") Max vertical panel thickness: 6mm(1/4") VBP1.2 bolt: Ø19mm(3/4") Vertical panel requires Ø8mm(5/16") holes</p>		





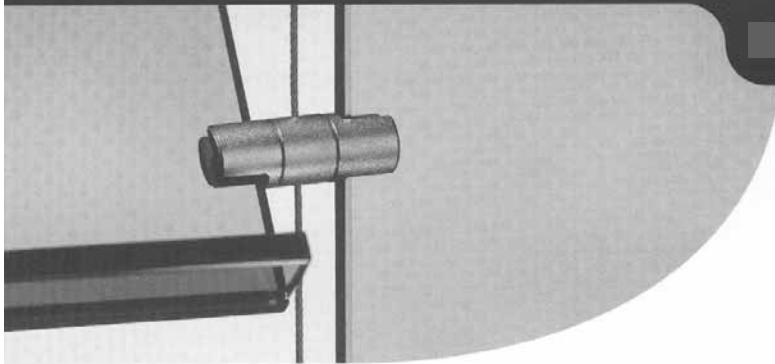















Combination Supports

























<p>CSM12.1</p> 	<p>COMBINATION SUPPORT Max. shelf/panel thickness: 8mm(5/16") Max. vertical panel thickness: 8mm(5/16") VBP2.1 bolt: Ø16mm(5/8") Vertical panel requires Ø8mm(5/16") holes</p>		
<p>CSM12.2</p> 	<p>COMBINATION SUPPORT Max. shelf/panel thickness: 10mm(3/8") Max. vertical panel thickness: 8mm(5/16") VBP2.2 bolt: Ø19mm(3/4") Vertical panel requires Ø8mm(5/16") holes</p>		





















For all pivoting hardware (CSM1 to CSM4 and CSM10 to CSM14), there are two pivot screws available. One allows the free rotation of the support while the other allows the support to be tightened at a specific angle. Both pivot screws are included with each support to allow for infinite design possibilities.



























<p>CS4.1</p> 	<p>VERTICAL SUPPORT Panel thickness: Minimum: 4mm(5/32") Maximum: 8mm(5/16") Cable spacing: panel width + 19mm(3/4")</p>		
<p>CS5.1</p> 	<p>DOUBLE VERTICAL SUPPORT Panel thickness: Minimum: 4mm(5/32") Maximum: 8mm(5/16") Cable spacing: panel width + 19mm(3/4")</p>		
<p>CS6.1</p> 	<p>VERTICAL SUPPORT Top and bottom support Panel thickness: Minimum: 4mm(5/32") Maximum: 8mm(5/16")</p>		
<p>CR1.1</p> 	<p>WOODEN PANEL SUPPORT Used in combination with CR3.1 Unlimited panel thickness. Cable spacing: panel width + 35mm(1 3/8")</p>		
<p>CR1.2</p> 	<p>WOODEN PANEL SUPPORT Used in combination with CR3.2 Unlimited panel thickness. Cable spacing: panel width + 35mm(1 3/8")</p>		







<p>CR2.1</p> 	<p>DOUBLE WOODEN SUPPORT Used in combination with CR3.1 Unlimited panel thickness. Cable spacing: panel width + 35mm(1 3/8")</p>		
<p>CR2.2</p> 	<p>DOUBLE WOODEN SUPPORT Used in combination with CR3.2 Unlimited panel thickness. Cable spacing: panel width + 35mm(1 3/8")</p>		
<p>CR3.1</p> 	<p>ADAPTIVE SUPPORT RING These support rings can be fastened to many materials such as wood and acrylic. They fit inside all of the above parts including the W3 series of wall supports, allowing endless possibilities for shelving and vertical displays</p>		
<p>CR3.2</p> 			
<p>CR4.1</p> 	<p>VERTICAL PANEL SUPPORT RING Threaded ring combined with VBD1, CR1, CR2 and W3 allow a vertical panel of any shape to be suspended on cables.</p> <p>Ø8mm(5/16") hole required Panel thickness: From 8mm(5/16") to 12mm(1/2")</p>	 <p>*VBD1.1=13.5mm, VBD2.1=17.5mm</p>	
<p>CR4.2</p> 		 <p>*VBD1.2=13.5mm, VBD2.2=17.5mm</p>	
<p>CSM1.1</p> 	<p>PIVOTING SUPPORT Max. panel/shelf thickness: 8mm(5/16") Cable spacing: panel width + 19 mm(3/4")</p>		
<p>CSM1.2</p> 	<p>PIVOTING SUPPORT Max. panel/shelf thickness: 10mm(3/8") Cable spacing: panel width + 19 mm(3/4")</p>		


<p>CSM2.1</p> 	<p>DOUBLE PIVOTING SUPPORT Max. panel/shelf thickness: 8mm(5/16") Cable spacing: panel width + 19 mm(3/4")</p>		
<p>CSM2.2</p> 	<p>DOUBLE PIVOTING SUPPORT Max. panel/shelf thickness: 10mm(3/8") Cable spacing: panel width + 19 mm(3/4")</p>		
<p>CSM3.1</p> 	<p>PIVOTING VERTICAL PANEL SUPPORT Max. panel thickness: 8mm(5/16") Ideal for supporting shaped panels such as circles and ovals</p>		
<p>CSM3.2</p> 	<p>PIVOTING VERTICAL PANEL SUPPORT Max. panel thickness: 8mm(5/16") Ideal for supporting shaped panels such as circles and ovals</p>		
<p>CSM4.1</p> 	<p>DOUBLE PIVOTING VERTICAL PANEL SUPPORT Max. panel thickness: 8mm(5/16") Supports 2 panels of the same size back to back</p>		
<p>CSM4.2</p> 	<p>DOUBLE PIVOTING VERTICAL PANEL SUPPORT Max. panel thickness: 8mm(5/16") Supports 2 panels of the same size back to back</p>		
<p>CSM5.1</p> 	<p>VERTICAL PANEL SUPPORT Max. panel thickness: 6mm(1/4") VBP1.1 bolt: Ø16mm(5/8") requires Ø8mm(5/16") holes</p>		
<p>CSM5.2</p> 	<p>VERTICAL PANEL SUPPORT Max. panel thickness: 6mm(1/4") VBP1.2 bolt: Ø19mm(3/4") requires Ø8mm(5/16") holes</p>		









<p>CSM6.1</p> 	<p>VERTICAL PANEL SUPPORT Max. panel thickness: 8mm(5/16") VBP2.1 bolt: Ø16mm(5/8") requires Ø8mm(5/16") holes</p>		
<p>CSM6.2</p> 	<p>VERTICAL PANEL SUPPORT Max. panel thickness: 8mm(5/16") VBP2.2 bolt: Ø19mm(3/4") requires Ø8mm(5/16") holes</p>		
<p>CSM7.1</p> 	<p>DOUBLE VERTICAL PANEL SUPPORT Max. panel thickness: 6mm(1/4") VBP1.1 bolt: Ø16mm(5/8") requires Ø8mm(5/16") holes</p>		
<p>CSM7.2</p> 	<p>DOUBLE VERTICAL PANEL SUPPORT Max. panel thickness: 6mm(1/4") VBP1.2 bolt: Ø19mm(3/4") requires Ø8mm(5/16") holes</p>		
<p>CSM8.1</p> 	<p>DOUBLE VERTICAL PANEL SUPPORT Max. panel thickness: 8mm(5/16") VBP2.1 bolt: Ø16mm(5/8") requires Ø8mm(5/16") holes</p>		
<p>CSM8.2</p> 	<p>DOUBLE VERTICAL PANEL SUPPORT Max. panel thickness: 8mm(5/16") VBP2.2 bolt: Ø19mm(3/4") requires Ø8mm(5/16") holes</p>		
<p>CSM9.1</p> 	<p>DOUBLE VERTICAL PANEL SUPPORT For 6mm(1/4") thick panel on one side and 8mm(5/16") on the other. VBP1.1 bolt: Ø16mm(5/8") or VBP1.2 bolt: Ø19mm(3/4") requires Ø8mm(5/16") hole</p>		
<p>CSM9.2</p> 			


Combination Supports · Combination Vertical Panel Supports

<p>CSM10.1</p> 	<p>COMBINATION SUPPORT Max. shelf/panel thickness: 8mm(5/16") Max. vertical panel thickness: 8mm(5/16") Cable spacing: panel width + 19mm(3/4")</p>		
<p>CSM10.2</p> 	<p>COMBINATION SUPPORT Max. shelf/panel thickness: 10mm(5/16") Max. vertical panel thickness: 8mm(5/16") Cable spacing: panel width + 19mm(3/4")</p>		
<p>CSM11.1</p> 	<p>COMBINATION SUPPORT Max. shelf/panel thickness: 8mm(5/16") Max. vertical panel thickness: 6mm(1/4") VBP1.1 bolt: Ø16mm(5/8") requires Ø8mm(5/16") holes</p>		
<p>CSM11.2</p> 	<p>COMBINATION SUPPORT Max. shelf/panels thickness: 10mm(3/8") Max. vertical panel thickness: 6mm(1/4") VBP1.2 bolt: Ø19mm(3/4") requires Ø8mm(5/16") holes</p>		
<p>CSM12.1</p> 	<p>COMBINATION SUPPORT Max. panel/shelf thickness: 8mm(5/16") Max. vertical panel thickness: 8mm(5/16") VBP2.1 bolt: Ø16mm(5/8") requires Ø8mm(5/16") holes</p>		
<p>CSM12.2</p> 	<p>COMBINATION SUPPORT Max. panel/shelf thickness: 10mm(3/8") Max. vertical panel thickness: 8mm(5/16") VBP2.2 bolt: Ø19mm(3/4") requires Ø8mm(5/16") holes</p>		
<p>CSM13.1</p> 	<p>COMBINATION VERTICAL PANEL SUPPORT This versatile support can accommodate 2 parallel panels, one with holes and one without Max. thickness (holes): 6mm(1/4") requires Ø8mm(5/16") holes Max. thickness (no holes): 8mm(5/16") VBP1.1 bolt: Ø16mm(5/8")</p>		
<p>CSM13.2</p> 	<p>COMBINATION VERTICAL PANEL SUPPORT This versatile support can accommodate 2 parallel panels, one with holes and one without Max. thickness (holes): 6mm(1/4") requires Ø8mm(5/16") holes Max. thickness (no holes): 8mm(5/16") VBP1.2 bolt: Ø19mm(3/4")</p>		

<p>CSM14.1</p> 	<p>COMBINATION VERTICAL PANEL SUPPORT This versatile support can accommodate 2 parallel panels, one with holes and one without Max. thickness (holes): 8mm(5/16") requires Ø8mm(5/16") holes Max. thickness (no holes): 8mm(5/16") VBP1.1 bolt: Ø16mm(5/8")</p>		
<p>CSM14.2</p> 	<p>COMBINATION VERTICAL PANEL SUPPORT This versatile support can accommodate 2 parallel panels, one with holes and one without Max. thickness (holes): 8mm(5/16") requires Ø8mm(5/16") holes Max. thickness (no holes): 8mm(5/16") VBP1.2 bolt: Ø19mm(3/4")</p>		

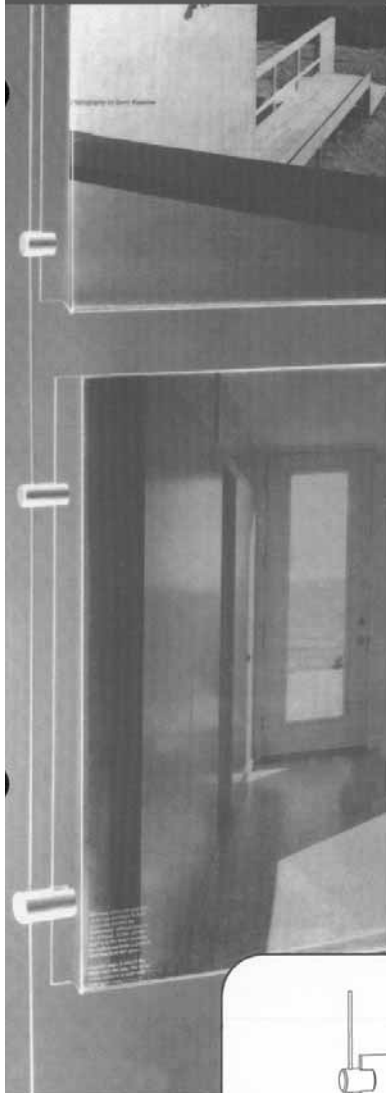







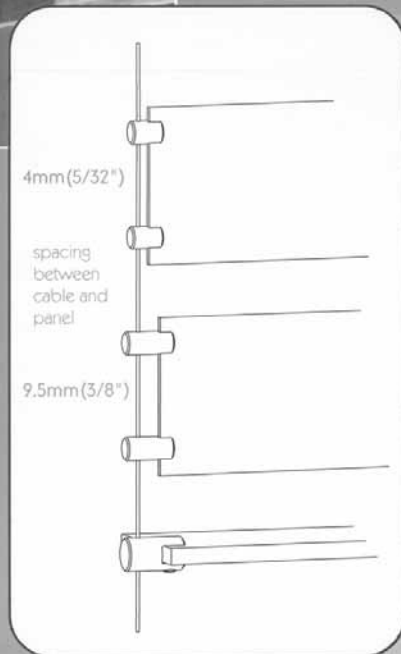











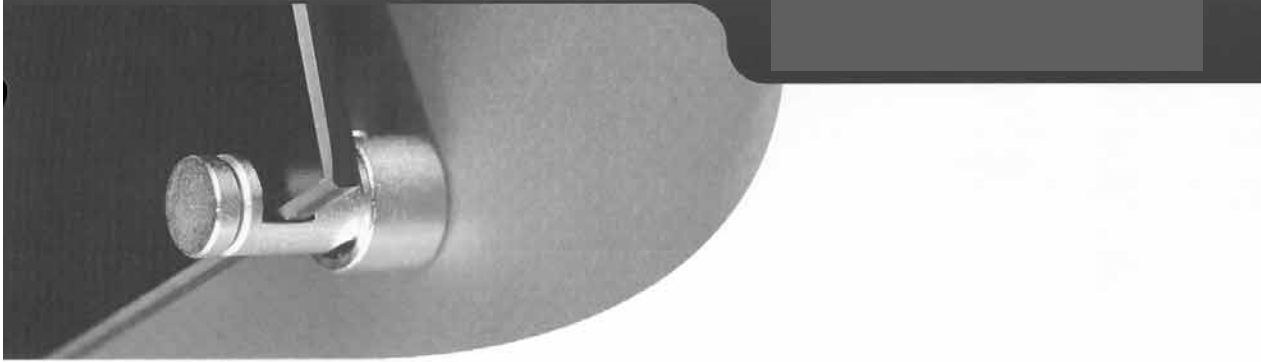
<p>CS4.A</p> 	<p>HORIZONTAL SUPPORT Panel thickness: Maximum: 4mm (5/32") Cable spacing: Panel width + 8mm (5/16")</p>	
<p>CS4.B</p> 	<p>HORIZONTAL SUPPORT Panel thickness: Maximum: 4mm (5/32") Cable spacing: Panel width + 19mm (3/4")</p>	
<p>CS5.A</p> 	<p>DOUBLE HORIZONTAL SUPPORT Panel thickness: Maximum: 4mm (5/32") Cable spacing: Panel width + 8mm (5/16")</p>	
<p>CS5.B</p> 	<p>DOUBLE HORIZONTAL SUPPORT Panel thickness: Maximum: 4mm (5/32") Cable spacing: Panel width + 19mm (3/4")</p>	









Minis
Minis


Minis! Wonderful new little supports designed specifically for 5/32" thick signage panels. The long version is to be used in combination with the standard sized supports on the same cable. The short version is used where only the thin panels will be displayed.




















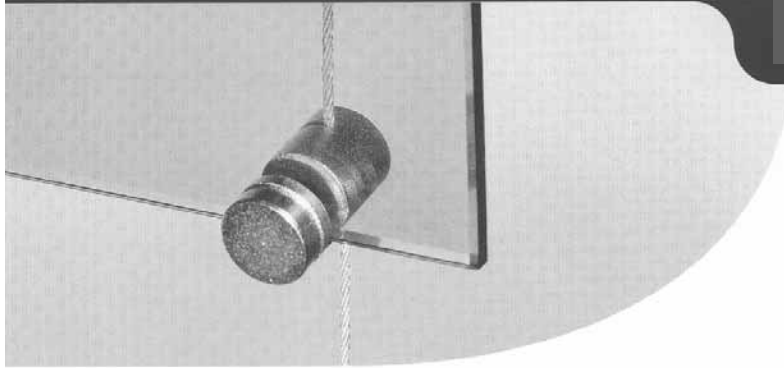
















<p>W1.1</p> 	<p>WALL MOUNTED PIVOTING SUPPORT Perfect for signage perpendicular to a wall Max. panel/shelf thickness: 8mm(5/16")</p>		
<p>W1.2</p> 	<p>WALL MOUNTED PIVOTING SUPPORT Perfect for signage perpendicular to a wall Max. panel/shelf thickness: 10mm(3/8")</p>		
<p>W3.1</p> 	<p>WALL MOUNTED SUPPORT Combine with: 1. CR4.1 - signage parallel to wall with Ø8mm(5/16") holes 2. WS6.1 - signage parallel to wall max. sign thickness 8mm(5/16") 3. CR3.1 - wood panel support</p>		 <p>VBD1.1 CR4.1+W3.1</p>
<p>W3.2</p> 	<p>WALL MOUNTED SUPPORT Combine with: 1. CR4.2 - signage parallel to wall with Ø8mm(5/16") holes 2. CR3.2 - wood panel support</p>		 <p>WS6.1 W3.1 CR3.1+W3.1</p>
<p>W4.1</p> 	<p>VERTICAL PANEL SUPPORT Combine with RM10 or CM10 wall adapter To mount panels parallel to wall Max. panel thickness: 8mm(5/16")</p>		
<p>WS6.1</p> 	<p>VERTICAL PANEL SUPPORT To be used with W3.1 wall support Max. panel thickness 8mm(5/16")</p>		 <p>WS6.1 W3.1 37mm</p>

<p>WMS1.1</p> 	<p>SIGNAGE STAND-OFF 3-part assembly includes VW5.1, W5.1 and W7.1 Mounts panel 40mm (1 1/2") from wall Requires Ø8mm (5/16") holes max. panel thickness 19mm (3/4")</p>		
<p>WMS2.1</p> 	<p>SIGNAGE STAND-OFF 2-part assembly includes W8.1 and W9.1 Mounts panel 20mm (3/4") from wall. Requires 14mm Ø (9/16") holes Maximum panel thickness 12mm (1/2")</p>		











Shelf Stabilizers · Hang Rod Support ·
Double Hang Rod Support · Slatwall Adapter · Track Toggle



<p>LCC</p> 	<p>COMBINATION CONNECTOR Allows the installation of a horizontal 6mm rod between two cables.</p>		
<p>W2.1</p> 	<p>SHELF STABILIZER Max. shelf thickness: 8mm(5/16") Distance from wall: 16mm(5/8")-25mm(1") can also be used as single or double shelf support in a showcase or modular display</p>	 <p>Screw: VW2.1</p>	
<p>W2.2</p> 	<p>SHELF STABILIZER Max. shelf thickness: 10mm(3/8") Distance from wall: 16mm(5/8")-25mm(1") can also be used as single or double shelf support in a showcase or modular display</p>	 <p>Screw: VW2.2</p>	
<p>CR1.2</p> 	<p>HANG ROD SUPPORT Supports 19mm(3/4") hang rod Cable Spacing: hang rod + 19mm(3/4")</p>		
<p>CR2.2</p> 	<p>DOUBLE HANG ROD SUPPORT Supports 19mm(3/4") hang rods Cable Spacing: hang rod + 19 mm(3/4")</p>		
<p>SL.T</p> 	<p>TRACK TOGGLE Sliding adapter to install floor to ceiling cable kits in the aluminum track</p>		


VBD1.1 	DECORATIVE BOLT USED TO SUSPEND VERTICAL PANELS ON CABLES OR MOUNT TO A WALL Requires Ø8mm(5/16") hole For panels up to 8mm(5/16") thick		USE WITH CR4.1 + CR1.1 CR4.1 + CR2.1 CR4.1 + W3.1
VBD1.2 			USE WITH CR4.2 + CR1.2 CR4.2 + CR2.2 CR4.2 + W3.2
VBD2.1 	DECORATIVE BOLT USED TO SUSPEND VERTICAL PANELS ON CABLES OR MOUNT TO A WALL Requires Ø8mm(5/16") hole For panels up to 12mm(1/2") thick		USE WITH CR4.1 + CR1.1 CR4.1 + CR2.1 CR4.1 + W3.1
VBD2.2 			USE WITH CR4.2 + CR1.2 CR4.2 + CR2.2 CR4.2 + W3.2
VBP1.1 	DECORATIVE BOLT USED TO SUSPEND VERTICAL PANELS ON CABLES Requires Ø8mm(5/16") hole For panels up to 6mm(1/4") thick		SEE PAGE B2.3 & B2.4
VBP1.2 			
VBP2.1 	DECORATIVE BOLT USED TO SUSPEND VERTICAL PANELS ON CABLES Requires Ø8mm(5/16") hole For panels up to 8mm(5/16") thick		SEE PAGE B2.4
VBP2.2 			

Screws

<p>VPD1.1</p> 	<p>DECORATIVE BOLT USED TO REPLACE SET SCREW FOR THE LISTED SUPPORTS. THE HEAD DIAMETER COMPLETELY COVERS THE END OF THE SUPPORT</p>		<p>USE WITH CS6.1 CSM3.1 CSM4.1</p>
<p>VPD1.2</p> 	<p>Nylon tip to prevent panel from slipping</p>		<p>USE WITH CSM3.2 CSM4.2</p>
<p>VW2.1</p> 	<p>DECORATIVE BOLT USED TO SECURE SHELVING AWAY FROM A WALL OR WITH A SHELF SUPPORT Requires Ø8mm hole (depending on application)</p>		<p>USE WITH W2.1 see page B4.1</p>
<p>VW2.2</p> 	<p>DECORATIVE BOLT USED TO SECURE SHELVING AWAY FROM A WALL OR WITH A SHELF SUPPORT Requires Ø8mm hole (depending on application)</p>		<p>USE WITH W2.2 see page B4.1</p>
<p>VW5.1</p> 	<p>DECORATIVE BOLT USED TO MOUNT VERTICAL PANELS TO WALL Requires Ø8mm hole for panels up to 19mm(3/4") thick</p>		<p>USE WITH W5.1 + W7.1 see page B3.2</p>

Rod with Basic Fittings

The principal characteristics of the Cable Design Rod Systems are more dynamic eye-catching displays with a balance between beauty and form. The Rods can also be used as a free-hanging system for all kinds of displays and signage.

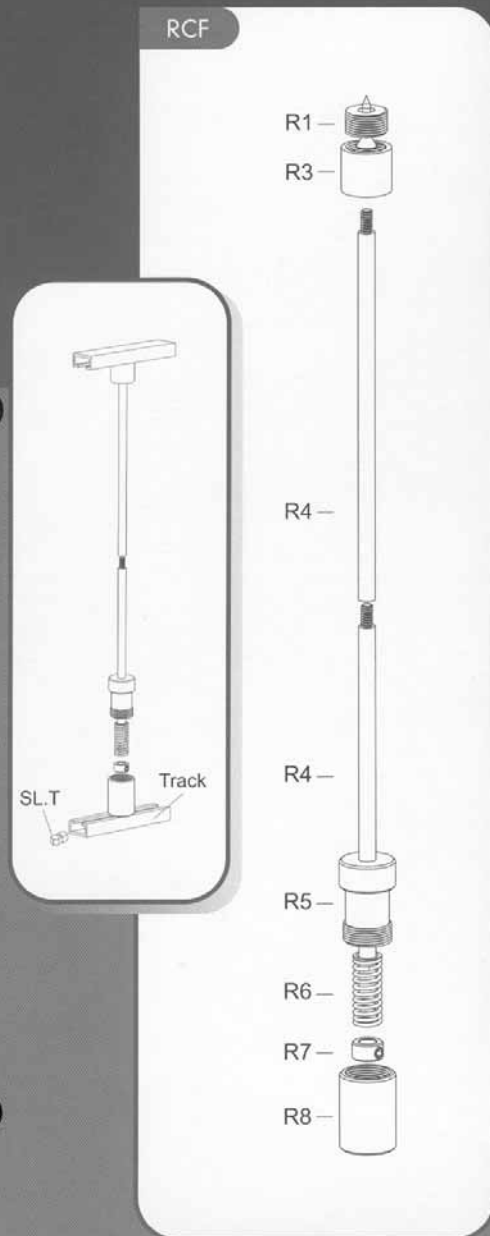

The Rod System can be used wherever the cables are used. Both are elegant and show the exposed items at their best since nothing is obstructing the view. Their load capacities are very similar.

Why then two different systems and when do you choose one rather than the other?

The cables give an airy, floating impression, often almost disappearing from view in some cases. Installations with the Rod systems look more structured and symmetrical while still enhancing the overall effect of the items on display.

Our rods are stainless steel and have a diameter of 6mm (a little less than 1/4"). They have a female thread on one end and a male thread at the other, so they can easily be fastened together. Rods are available in 4 different lengths: 1', 2', 3' and 4' to form any overall length required.

Our basic Rod kit (RCF) is composed of parts R1 through R8 (top and bottom anchoring components), and has a spring on the bottom to assure proper tension. Whichever Rod kit is chosen, the length of the rods themselves must be added as there is no standard length of rod included.

All of the Rod kits have to be anchored into a solid material or mounted onto our aluminium track for mobility.



All components are made from brass with a satin chrome finish. Other finishes such as polished chrome or brass, satin brass and black are made to order. Brass rods must be used for these special finishes. Note however that brass rods are less rigid than stainless steel.

RODS ARE AVAILABLE IN 4 LENGTHS

- R4.1 — 1' (305mm)
- R4.2 — 2' (610mm)
- R4.3 — 3' (912mm)
- R4.4 — 4' (1219mm)

For Posters, Signage, Graphics, etc. (Wall to Floor, Wall to Wall, Ceiling to Wall)

SYSTEM RWW




Wall to rod: 21mm

With the simple addition of our special toggles any of the wall rods can be converted for use with Slatwall




FOR BANNERS SIGNAGE & GLASS CASES

SYSTEM RCS

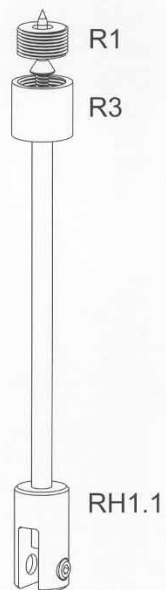

SYSTEM RGT

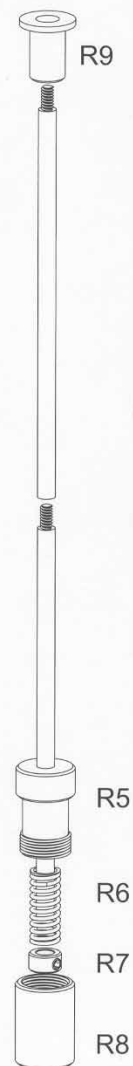

WALL TO FLOOR WALL TO WALL CEILING TO WALL


SYSTEM RCAF





SYSTEM RAA











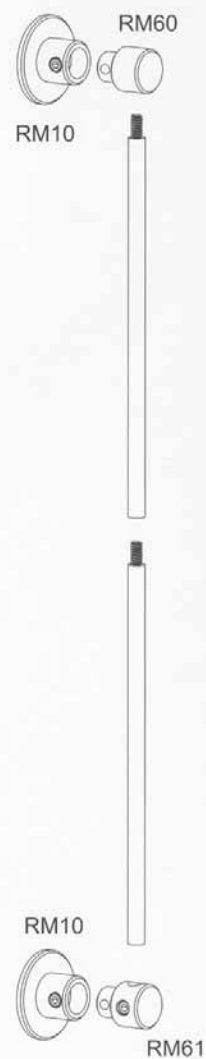










SYSTEM RWW

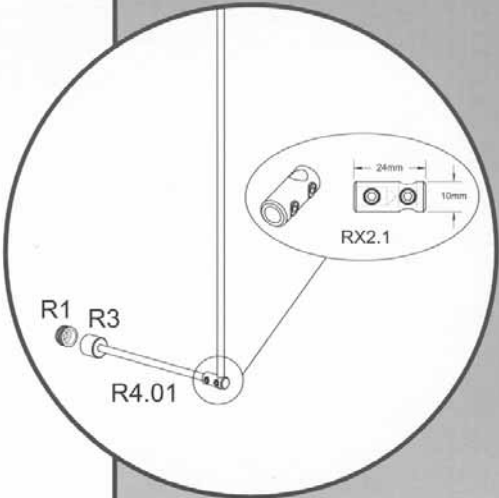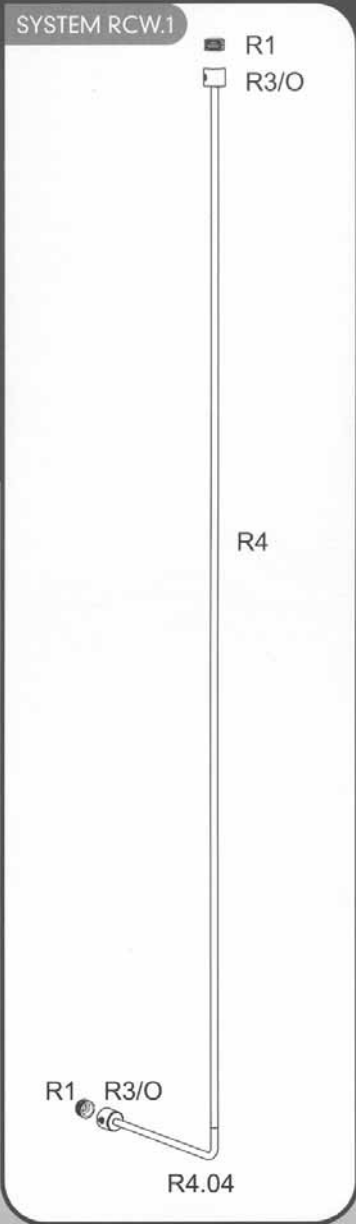



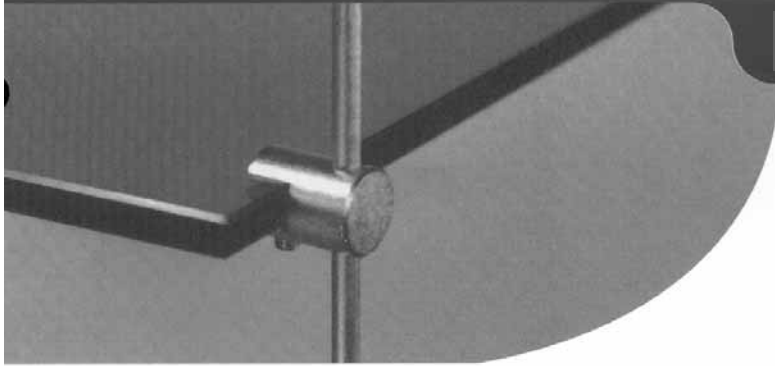





















For Optical (Wall to Floor, Ceiling to Wall)











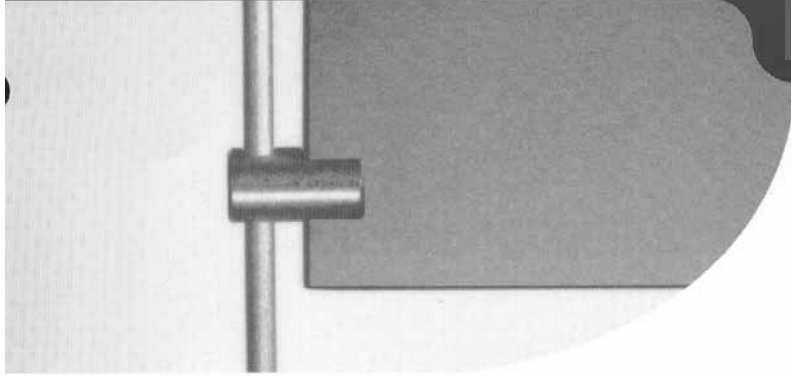
<p>RS1.1</p> 	<p>HORIZONTAL SUPPORT Shelf thickness: 6mm(1/4") - 10mm(3/8") Drill hole: 8mm(5/16") Minimum slot width: 7mm(17/64")</p>		
<p>RS1.2</p> 	<p>HORIZONTAL SUPPORT Shelf thickness: 10mm(3/8") - 12mm(1/2") Drill hole: Ø12mm(1/2") Minimum slot width: 7mm(17/64")</p>		
<p>RS2.1</p> 	<p>HORIZONTAL SUPPORT Max. shelf thickness: 8mm(5/16") Rod spacing: shelf width + 19mm(3/4")</p>		
<p>RS2.2</p> 	<p>HORIZONTAL SUPPORT Max. shelf thickness: 10mm(3/8") Rod spacing: shelf width + 19mm(3/4")</p>		
<p>RS3.1</p> 	<p>DOUBLE HORIZONTAL SUPPORT Max. shelf thickness: 8mm(5/16") Rod spacing: shelf width + 19mm(3/4")</p>		
<p>RS3.2</p> 	<p>DOUBLE HORIZONTAL SUPPORT Max. shelf thickness: 10mm(3/8") Rod spacing: shelf width + 19mm(3/4")</p>		
















<p>RSM1.1</p> 	<p>PIVOTING SUPPORT Max. shelf/panel thickness: 8mm(5/16") Rod spacing: shelf/panel width + 19mm(3/4")</p>		
<p>RSM1.2</p> 	<p>PIVOTING SUPPORT Max. shelf/panel thickness: 10mm(3/8") Rod spacing: shelf/panel width + 19mm(3/4")</p>		
<p>RSM2.1</p> 	<p>DOUBLE PIVOTING SUPPORT Max. shelf/panel thickness: 8mm(5/16") Rod spacing: shelf/panel width + 19mm(3/4")</p>		
<p>RSM2.2</p> 	<p>DOUBLE PIVOTING SUPPORT Max. shelf/panel thickness: 10mm(3/8") Rod spacing: shelf/panel width + 19mm(3/4")</p>		
<p>RSM10.1</p> 	<p>COMBINATION SUPPORT Max. shelf/panel thickness: 8mm(5/16") Max vertical panel thickness: 8mm(5/16") Rod spacing: shelf/panel width + 19mm(3/4")</p>		
<p>RSM10.2</p> 	<p>COMBINATION SUPPORT Max. shelf/panel thickness: 10mm(3/8") Max vertical panel thickness: 8mm(5/16") Rod spacing: shelf/panel width + 19mm(3/4")</p>		
<p>RSM11.1</p> 	<p>COMBINATION SUPPORT Max. shelf/panel thickness: 8mm(5/16") Max vertical panel thickness: 6mm(1/4") VBP1.1 bolt: Ø16mm(5/8") Vertical panel requires Ø8mm(5/16") holes</p>		
<p>RSM11.2</p> 	<p>COMBINATION SUPPORT Max. shelf/panel thickness: 10mm(3/8") Max vertical panel thickness: 6mm(1/4") VBP1.2 bolt: Ø19mm(3/4") Vertical panel requires Ø8mm(5/16") holes</p>		

Combination Supports






















<p>RSM12.1</p> 	<p>COMBINATION SUPPORT Max. shelf/panel thickness: 8mm(5/16") Max vertical panel thickness: 8mm(5/16") VBP2.1 bolt: Ø16mm(5/8") Vertical panel requires Ø8mm(5/16") holes</p>		
<p>RSM12.2</p> 	<p>COMBINATION SUPPORT Max. shelf/panel thickness: 10mm(3/8") Max vertical panel thickness: 8mm(5/16") VBP2.2 bolt: Ø19mm(3/4") Vertical panel requires Ø8mm(5/16") holes</p>		

For all pivoting hardware (RSM1 to RSM4 and RSM10 to RSM14), there are two pivot screws available. One allows the free rotation of the support while the other allows the support to be tightened at a specific angle. Both pivot screws are included with each support to allow for infinite design possibilities.















































<p>RS4.1</p> 	<p>VERTICAL SUPPORT Max. panel thickness: 8mm(5/16") Rod spacing: panel width + 19mm(3/4")</p>		
<p>RS5.1</p> 	<p>DOUBLE VERTICAL SUPPORT Max. panel thickness: 8mm(5/16") Rod spacing: panel width + 19mm(3/4")</p>		
<p>RS6.1</p> 	<p>VERTICAL SUPPORT Top and bottom support Max. panel thickness: 8mm(5/16")</p>		
<p>RR1.1</p> 	<p>WOODEN PANEL SUPPORT Used in combination with RR3.1 Unlimited panel thickness. Rod spacing: panel width + 35mm(1 3/8")</p>		
<p>RR1.2</p> 	<p>WOODEN PANEL SUPPORT Used in combination with RR3.2 Unlimited panel thickness. Rod spacing: panel width + 35mm(1 3/8")</p>		

























Double Wooden Panel Supports · Adaptive Support Ring
Vertical Panel Support Ring · Pivoting Supports

<p>RR2.1</p> 	<p>DOUBLE WOODEN SUPPORT Used in combination with RR3.1 Unlimited panel thickness. Rod spacing: panel width + 35mm(1 3/8")</p>		
<p>RR2.2</p> 	<p>DOUBLE WOODEN SUPPORT Used in combination with RR3.2 Unlimited panel thickness. Rod spacing: panel width + 35mm(1 3/8")</p>		
<p>RR3.1</p> 	<p>ADAPTIVE SUPPORT RING These support rings can be fastened to many materials such as wood and acrylic. They fit inside all of the parts including the W3 series of wall supports, allowing endless possibilities for shelving and vertical displays</p>		
<p>RR3.2</p> 			
<p>RR4.1</p> 	<p>VERTICAL PANEL SUPPORT RING Threaded ring combined with VBD1, RR1, RR2 and W3 allow a vertical panel of any shape to be suspended on rods.</p>	 <p>*VBD1.1=13.5mm, VBD2.1=17.5mm</p>	
<p>RR4.2</p> 	<p>Ø8mm(5/16") hole required Panel thickness: From 8mm(5/16") to 12mm(1/2")</p>	 <p>*VBD1.2=13.5mm, VBD2.2=17.5mm</p>	
<p>RSM1.1</p> 	<p>PIVOTING SUPPORT Max. panel/shelf thickness: 8mm(5/16") Rod spacing: panel/shelf width + 19 mm(3/4")</p>		
<p>RSM1.2</p> 	<p>PIVOTING SUPPORT Max. panel/shelf thickness: 10mm(3/8") Rod spacing: panel/shelf width + 19 mm(3/4")</p>		


Double Pivoting Supports · Pivoting Vertical Panel Supports ·
 Double Pivoting Vertical Panel Supports · Vertical Panel Supports

<p>RSM2.1</p> 	<p>DOUBLE PIVOTING SUPPORT Max. panel/shelf thickness: 8mm(5/16") Rod spacing: panel width + 19 mm(3/4")</p>		
<p>RSM2.2</p> 	<p>DOUBLE PIVOTING SUPPORT Max. panel/shelf thickness: 10mm(3/8") Rod spacing: panel width + 19 mm(3/4")</p>		
<p>RSM3.1</p> 	<p>PIVOTING VERTICAL PANEL SUPPORT Max. panel thickness: 8mm(5/16") Ideal for supporting shaped panels such as circles and ovals</p>		
<p>RSM3.2</p> 	<p>PIVOTING VERTICAL PANEL SUPPORT Max. panel thickness: 8mm(5/16") Ideal for supporting shaped panels such as circles and ovals</p>		
<p>RSM4.1</p> 	<p>DOUBLE PIVOTING VERTICAL PANEL SUPPORT Max. panel thickness: 8mm(5/16") Supports 2 panels of the same size back to back</p>		
<p>RSM4.2</p> 	<p>DOUBLE PIVOTING VERTICAL PANEL SUPPORT Max. panel thickness: 8mm(5/16") Supports 2 panels of the same size back to back</p>		
<p>RSM5.1</p> 	<p>VERTICAL PANEL SUPPORT Max shelf thickness: 6mm(1/4") VBP1.1 bolt: Ø16mm(5/8") requires Ø8mm(5/16") holes</p>		
<p>RSM5.2</p> 	<p>VERTICAL PANEL SUPPORT Max shelf thickness: 6mm(1/4") VBP1.2 bolt: Ø19mm(3/4") requires Ø8mm(5/16") holes</p>		

<p>RSM6.1</p> 	<p>VERTICAL PANEL SUPPORT Max. panel thickness: 8mm(5/16") VBP2.1 bolt: Ø16mm(5/8") requires Ø8mm(5/16") holes</p>		
<p>RSM6.2</p> 	<p>VERTICAL PANEL SUPPORT Max. shelf thickness: 8mm(5/16") VBP2.2 bolt: Ø19mm(3/4") requires Ø8mm(5/16") holes</p>		
<p>RSM7.1</p> 	<p>DOUBLE VERTICAL PANEL SUPPORT Max. panel thickness: 6mm(1/4") VBP1.1 bolt: Ø16mm(5/8") requires Ø8mm(5/16") holes</p>		
<p>RSM7.2</p> 	<p>DOUBLE VERTICAL PANEL SUPPORT Max. panel thickness: 6mm(1/4") VBP1.2 bolt: Ø19mm(3/4") requires Ø8mm(5/16") holes</p>		
<p>RSM8.1</p> 	<p>DOUBLE VERTICAL PANEL SUPPORT Max. panel thickness: 8mm(5/16") VBP2.1 bolt: Ø16mm(5/8") requires Ø8mm(5/16") holes</p>		
<p>RSM8.2</p> 	<p>DOUBLE VERTICAL PANEL SUPPORT Max. panel thickness: 8mm(5/16") VBP2.2 bolt: Ø19mm(3/4") requires Ø8mm(5/16") holes</p>		
<p>RSM9.1</p> 	<p>DOUBLE VERTICAL PANEL SUPPORT For 6mm(1/4") thick panel on one side and 8mm(5/16") on the other. VBP1.1 bolt: Ø16mm(5/8") or VBP1.2 bolt: Ø19mm(3/4") requires Ø8mm(5/16") holes</p>		
<p>RSM9.2</p> 			


<p>RSM10.1</p> 	<p>COMBINATION SUPPORT Max. shelf/panel thickness: 8mm(5/16") Max. vertical panel thickness: 8mm(5/16") Rod spacing: panel width + 19mm(3/4")</p>		
<p>RSM10.2</p> 	<p>COMBINATION SUPPORT Max. shelf/panel thickness: 10mm(5/16") Max. vertical panel thickness: 8mm(5/16") Rod spacing: panel width + 19mm(3/4")</p>		
<p>RSM11.1</p> 	<p>COMBINATION SUPPORT Max. shelf/panel thickness: 8mm(5/16") Max. vertical panel thickness: 6mm(1/4") vertical panel requires 8mm(5/16") holes Ø16mm(5/8") decorative screw (VBP1.1)</p>		
<p>RSM11.2</p> 	<p>COMBINATION SUPPORT Max. shelf/panel thickness: 10mm(3/8") Max. vertical panel thickness: 6mm(1/4") vertical panel requires 8mm(5/16") holes Ø19mm(5/8") decorative screw (VBP1.2)</p>		
<p>RSM12.1</p> 	<p>COMBINATION SUPPORT Max. panel/shelf thickness: 8mm(5/16") Max. vertical panel thickness: 8mm(5/16") VBP2.1 bolt: Ø16mm(5/8") requires Ø8mm(5/16") holes</p>		
<p>RSM12.2</p> 	<p>COMBINATION SUPPORT Max. panel/shelf thickness: 10mm(3/8") Max. vertical panel thickness: 8mm(5/16") VBP2.2 bolt: Ø19mm(3/4") requires Ø8mm(5/16") holes</p>		
<p>RSM13.1</p> 	<p>COMBINATION VERTICAL PANEL SUPPORT This versatile support can accommodate 2 parallel panels, one with holes and one without Max. thickness (holes): 6mm(1/4") requires Ø8mm(5/16") holes Max. thickness (no holes): 8mm(5/16") VBP1.1 bolt: Ø16mm(5/8")</p>		
<p>RSM13.2</p> 	<p>COMBINATION VERTICAL PANEL SUPPORT This versatile support can accommodate 2 parallel panels, one with holes and one without Max. thickness (holes): 6mm(1/4") requires Ø8mm(5/16") holes Max. thickness (no holes): 8mm(5/16") VBP1.2 bolt: Ø19mm(3/4")</p>		

RSM14.1




COMBINATION VERTICAL PANEL SUPPORT

This versatile support can accommodate 2 parallel panels, one with holes and one without
 Max. thickness (holes): 8mm(5/16")
 requires Ø8mm(5/16") holes
 Max. thickness (no holes): 8mm(5/16")
 VBP1.1 bolt: Ø16mm(5/8")





RSM14.2














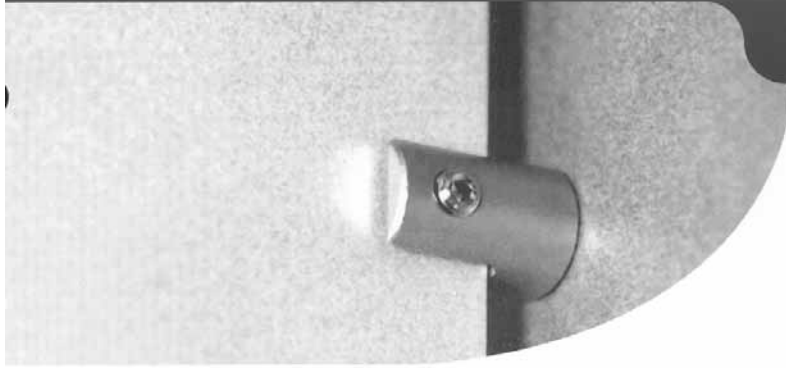







COMBINATION VERTICAL PANEL SUPPORT

This versatile support can accommodate 2 parallel panels, one with holes and one without
 Max. thickness (holes): 8mm(5/16")
 requires Ø8mm(5/16") holes
 Max. thickness (no holes): 8mm(5/16")
 VBP1.2 bolt: Ø19mm(3/4")




Wall Mounted Pivoting Supports · Wall Mounted Supports · Vertical Panel Supports





<p>W1.1</p> 	<p>WALL MOUNTED PIVOTING SUPPORT Perfect for signage perpendicular to a wall Max. panel/shelf thickness: 8mm(5/16")</p>		
<p>W1.2</p> 	<p>WALL MOUNTED PIVOTING SUPPORT Perfect for signage perpendicular to a wall Max. panel/shelf thickness: 10mm(3/8")</p>		
<p>W3.1</p> 	<p>WALL MOUNTED SUPPORT Combine with: 1. CR4.1 - signage parallel to wall with Ø8mm(5/16") holes 2. WS6.1 - signage parallel to wall max. sign thickness 8mm(5/16") 3. CR3.1 - wood panel support</p>		 <p>VBD1.1 CR4.1+W3.</p>
<p>W3.2</p> 	<p>WALL MOUNTED SUPPORT Combine with: 1. CR4.2 - signage parallel to wall with Ø8mm(5/16") holes 2. CR3.2 - wood panel support</p>		 <p>WS6.1 W3.1 CR3.1+W3.</p>
<p>W4.1</p> 	<p>VERTICAL PANEL SUPPORT Combine with RM10 or CM10 wall adapter To mount panels parallel to wall Max. panel thickness: 8mm(5/16")</p>		
<p>WS6.1</p> 	<p>VERTICAL PANEL SUPPORT To be used with W3.1 wall support Max. panel thickness 8mm(5/16")</p>		 <p>WS6.1 W3.1 37mm</p>

WMS1.1





SIGNAGE STAND-OFF
 3-part assembly includes
 VW5.1, W5.1 and W7.1
 Mounts panel 40mm (1 1/2")
 from wall
 Requires Ø8mm (5/16") holes
 max. panel thickness 19mm (3/4")

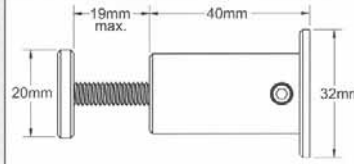


















WMS2.1











SIGNAGE STAND-OFF
 2-part assembly includes
 W8.1 and W9.1
 Mounts panel 20mm (3/4") from wall.
 Requires 14mm Ø (9/16") holes
 Maximum panel thickness
 12mm (1/2")

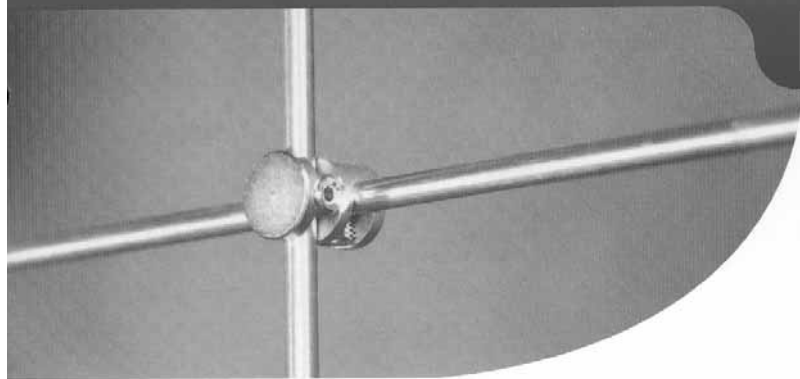






















<p>W2.1</p> 	<p>SHELF STABILIZER Max. shelf thickness: 8mm(5/16") Distance from wall: 16mm(5/8")-25mm(1") can also be used as single or double shelf support in a showcase or modular display</p>		
<p>W2.2</p> 	<p>SHELF STABILIZER Max. shelf thickness: 10mm(3/8") Distance from wall: 16mm(5/8")-25mm(1") can also be used as single or double shelf support in a showcase or modular display</p>		
<p>RR1.2</p> 	<p>HANG ROD SUPPORT Supports 19mm(3/4") hang rod Rod Spacing: hang rod + 19mm(3/4")</p>		
<p>RR2.2</p> 	<p>DOUBLE HANG ROD SUPPORT Supports 19mm(3/4") hang rod Rod Spacing: hang rod + 19mm(3/4")</p>		
<p>VBD1.1</p> 	<p>DECORATIVE BOLT USED TO SUSPEND VERTICAL PANELS ON RODS OR MOUNT TO A WALL</p> <p>Requires Ø8mm(5/16") hole For panels up to 8mm(5/16") thick</p>		<p>USE WITH RR4.1 + RR1.1 RR4.1 + RR2.1 RR4.1 + W3.1</p>
<p>VBD1.2</p> 	<p>DECORATIVE BOLT USED TO SUSPEND VERTICAL PANELS ON RODS OR MOUNT TO A WALL</p> <p>Requires Ø8mm(5/16") hole For panels up to 8mm(5/16") thick</p>		<p>USE WITH RR4.2 + RR1.2 RR4.2 + RR2.2 RR4.2 + W3.2</p>

<p>VBD2.1</p> 	<p>DECORATIVE BOLT USED TO SUSPEND VERTICAL PANELS ON RODS OR MOUNT TO A WALL</p> <p>Requires Ø8mm(5/16") hole For panels up to 12mm(1/2") thick</p>		<p>USE WITH RR4.1 + RR1.1 RR4.1 + RR2.1 RR4.1 + W3.1</p>
<p>VBD2.2</p> 			<p>USE WITH RR4.2 + RR1.2 RR4.2 + RR2.2 RR4.2 + W3.2</p>

<p>VBP1.1</p> 	<p>DECORATIVE BOLT USED TO SUSPEND VERTICAL PANELS ON RODS</p> <p>Requires Ø8mm(5/16") hole For panels up to 6mm(1/4") thick</p>		<p>SEE PAGE B2.3 & B2.4</p>
<p>VBP1.2</p> 			

<p>VBP2.1</p> 	<p>DECORATIVE BOLT USED TO SUSPEND VERTICAL PANELS ON RODS</p> <p>Requires Ø8mm(5/16") hole For panels up to 8mm(5/16") thick</p>		<p>SEE PAGE B2.4</p>
<p>VBP2.2</p> 			

<p>VPD1.1</p> 	<p>DECORATIVE BOLT USED TO REPLACE SET SCREW FOR THE LISTED SUPPORTS. THE HEAD DIAMETER COMPLETELY COVERS THE END OF THE SUPPORT</p>		<p>USE WITH RS6.1 RSM3.1 RSM4.1</p>
<p>VPD1.2</p> 	<p>Nylon tip to prevent panel from slipping</p>		<p>USE WITH RSM3.2 RSM4.2 RSM5.2 RSM7.2</p>

<p>SL.T</p> 	<p>TRACK TOGGLE Sliding adapter to install floor to ceiling rod kits in the aluminum track</p>		
<p>RX1.1</p> 	<p>90° 'X' CONNECTOR Connects 2 rods at 90° Rods are on a different plane</p>		
<p>RX2.1</p> 	<p>90° 'T' CONNECTOR Connects 2 rods at 90° Rods remain on the same plane</p>		
<p>LCR</p> 	<p>COMBINATION CONNECTOR Allows the installation of a horizontal 6mm rod between two rods.</p>		



OPTICAL



Combine the clean lines and distinctive design of the SPACE LINE Rod System with the discreet look of our new RGH supports to create optical displays that really stand out. The RGH, made from a clear resin, is rigid yet has been designed with flexibility in mind. The compact design makes it infinitely adjustable and the best choice for all optical applications.

Incorporating the SPACE LINE Rod System into your optical displays also allows you to adapt shelving, mirrors or graphics panels into the design as well.

OPTICAL



OPR1



OPR2



OPR3



OPR4












OPR5



















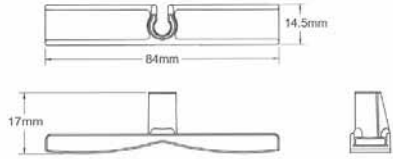
OPR6











OPR7






<p>R4.1</p> 	<p>STRAIGHT ROD Threaded at both ends Diameter 6mm Length 1 foot (305mm)</p>		
<p>R4.2</p> 	<p>STRAIGHT ROD Threaded at both ends Diameter 6mm Length 2 feet (610mm)</p>		
<p>R4.3</p> 	<p>STRAIGHT ROD Threaded at both ends Diameter 6mm Length 3 feet (914mm)</p>		
<p>R4.4</p> 	<p>STRAIGHT ROD Threaded at both ends Diameter 6mm Length 4 feet (1220mm)</p>		




<p>R4.01</p> 	<p>STRAIGHT ROD Unthreaded ends Diameter 6mm Length 6.5 inches (165mm)</p>		
<p>R4.02</p> 	<p>STRAIGHT ROD Unthreaded ends Diameter 6mm Length 4 feet (1220mm)</p>		
<p>R4.03</p> 	<p>BENT ROD 90° bend at each end Unthreaded ends Diameter 6mm Length 4 feet (1220mm) Depth 6.75 inches (171mm)</p>		
<p>R4.04</p> 	<p>BENT ROD One 90° bend One threaded end (male) Diameter 6mm Length 4 inches (120mm) Depth 6.75 inches (171mm)</p>		
<p>R4.05</p> 	<p>BENT ROD One 90° bend One threaded end (female) Diameter 6mm Length 4 inches (120mm) Depth 6.75 inches (171mm)</p>		

<p>RGH</p> 	<p>ROD GLASSES HOLDER Supports virtually any eyeglasses on SPACELINE rods Clip-on installation and infinite adjustability Made from a clear resin.</p>	
---	--	--

<p>RCF</p> 	<p>ANCHORS Top and bottom anchors For straight threaded rods To be used with OPR1 (Rods not included)</p>		
---	--	--	---

<p>R1</p> 	<p>ANCHOR Interior top wall or ceiling anchor</p>		
<p>R3</p> 	<p>ANCHOR Exterior top wall or ceiling anchor For threaded rods To be used with OPR4, OPR7</p>		

<p>R1</p> 	<p>ANCHOR Interior top wall or ceiling anchor</p>		
<p>R3.0</p> 	<p>ANCHOR Exterior top wall or ceiling anchor For unthreaded rods To be used with OPR2, OPR3, OPR4, OPR5, OPR6 and OPR7</p>		

<p>RX2.1</p> 	<p>90° 'T' CONNECTOR Connects 2 rods at 90° Rods remain on the same plane</p>		
---	--	--	---



CORPORATE REGIONAL OFFICES FOR UDV
Project by: Architect JCJ and Cable Design Inc., Wilmette, IL
Photograph: Barry Rustin










LINEN CHEST, Montreal, QC
Designer: TDI Associates Design Inc.

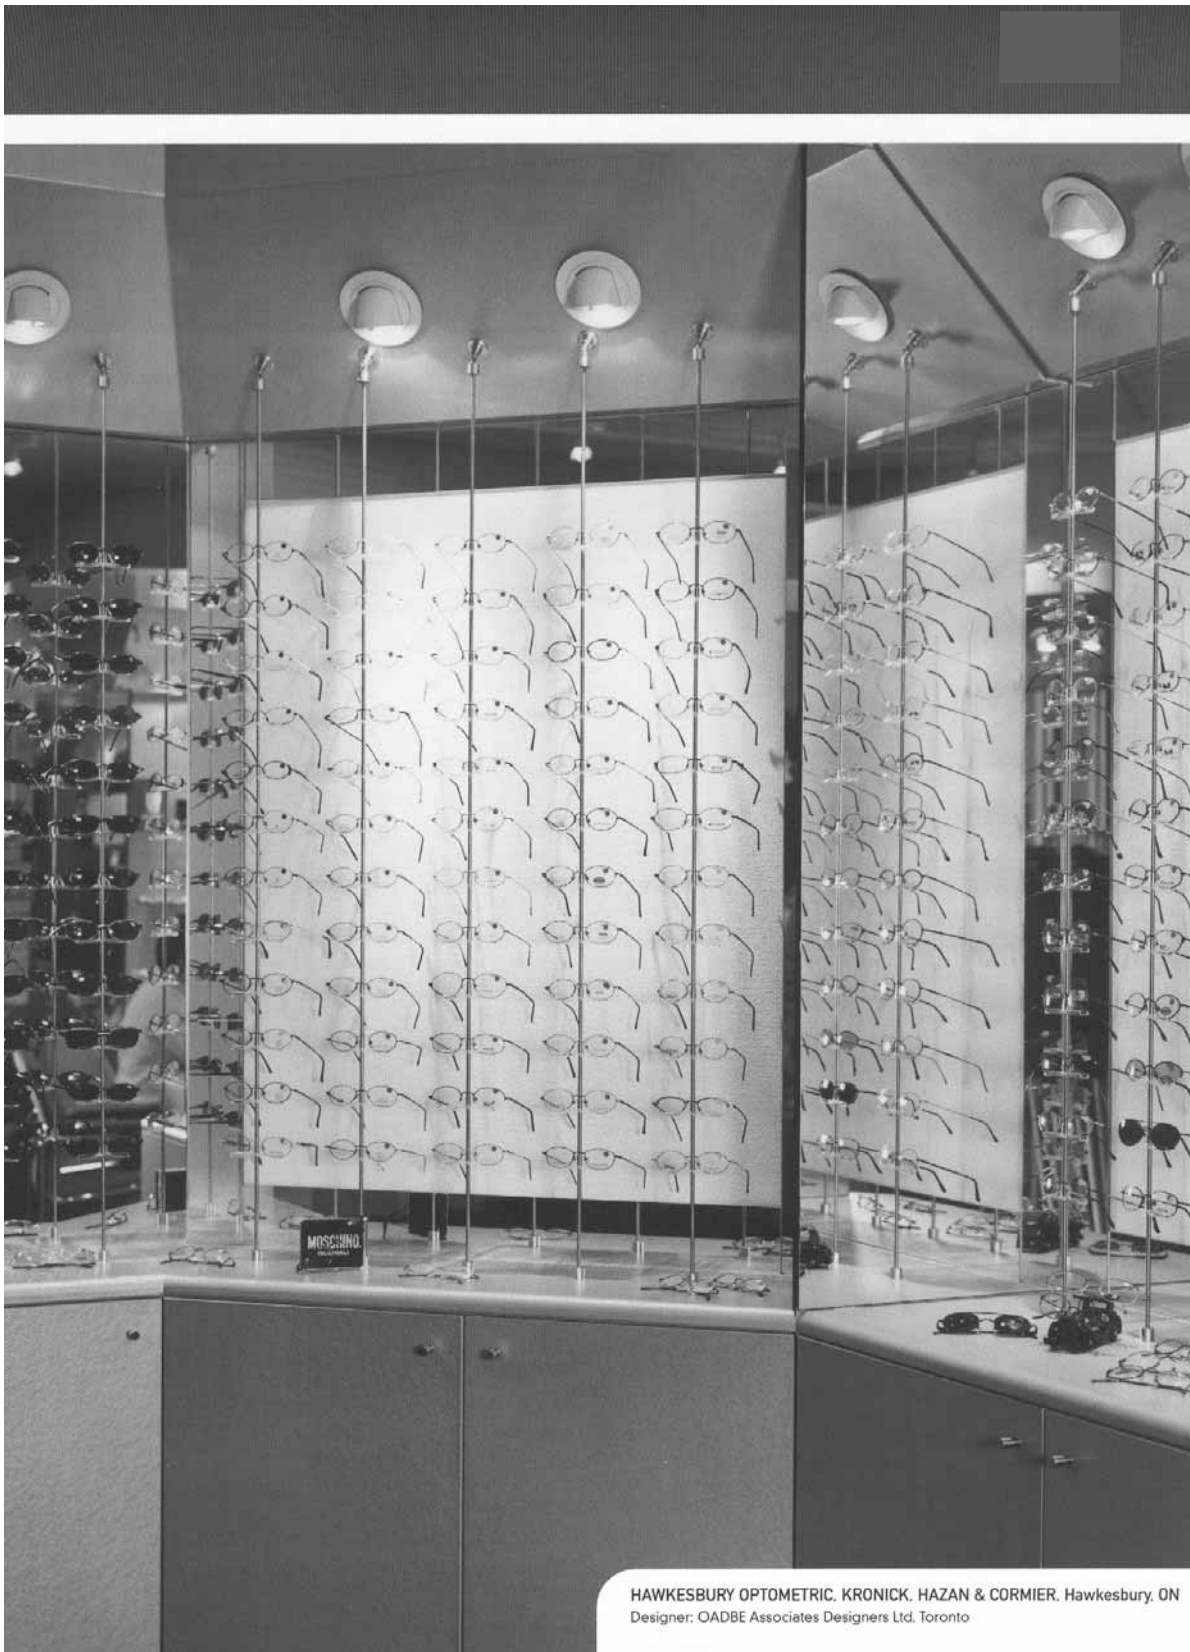

HAWKESBURY OPTOMETRIC, KRONICK, HAZAN & CORMIER, Hawkesbury, ON
Designer: OADBE Associates Designers Ltd, Toronto



CULTURAL CENTER RÉGINA ASSUMPTA, Montreal, QC
Designer: Gagnier & Gagnier Ltée.



CULTURAL CENTER REGINA ASSUMPTA, Montreal, QC
Designer: Les Architectes Gagnier & Gagnier Ltée.

